CLG400 - CANTILEVER GATE
CONFIGURATION OPTIONS

-16 - 25M Clear Opening Width
-1.8 - 2.4 Standard Gate Heights
-Standard Gate infill options
  -25SHS Pickets @115 or 135mm (Shown) Centres
  -358 Anti-Climb WeldMesh
  -358 Corromesh WeldMesh
-Optional saftey features shown, available at request

NOTE:
-Gate and Footings to be Engineered as per site requirements
-49 Metres total length required for Gate installation and Operation (20m Configuration)

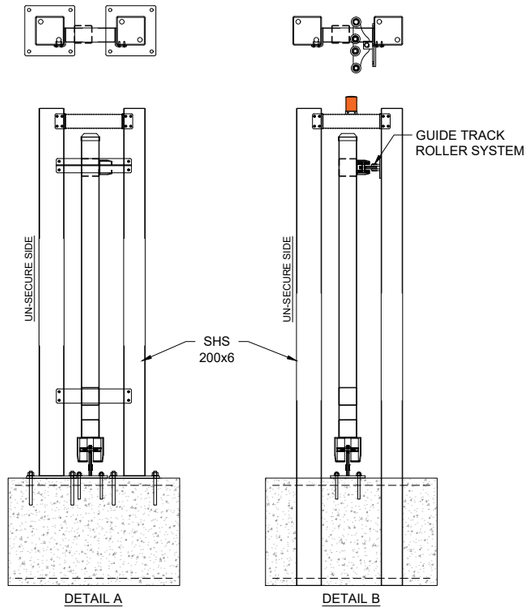

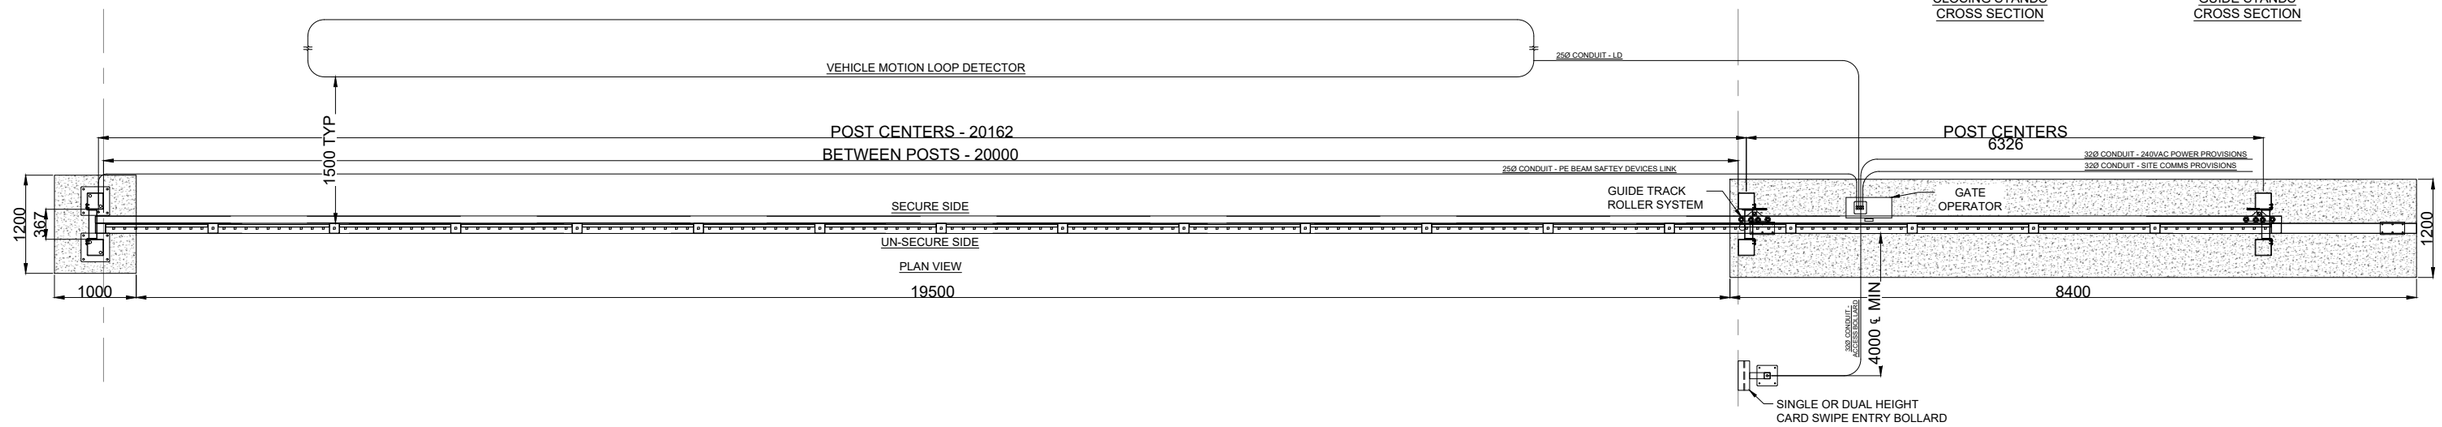

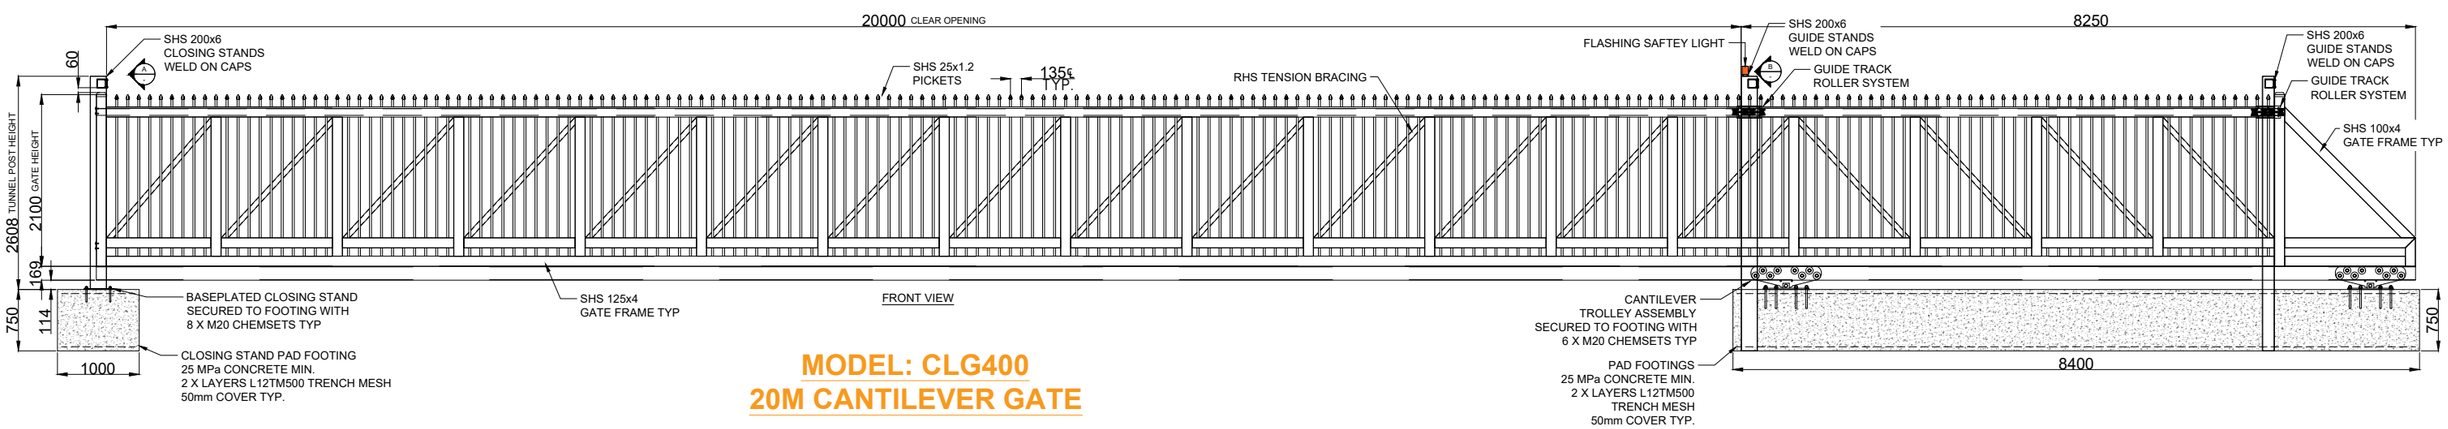

MODEL: CLG400
20M CANTILEVER GATE

This drawing includes the principles of design and is submitted by **Ideal Industries Pty Ltd** with the agreement that it not to be reproduced, copied or loaned inpart or whole. It is not to be used in any manner that may constitute a detriment directly or indirectly to **Ideal Industries Pty Ltd**. Acceptance of this drawing will be constructed as an agreement to the above.

Ideal Industries Pty Ltd
3 Narang Place
St Marys NSW 2760
Telephone: (02) 9675 4448
Email: sales@idealgates.com.au

Dwg No:			FINISH
IDEAL-CLG400			PC BLACK
Drawn: JG	Checked: AP	Approved: AP	Sheet: 1
Date: 25/09/2024		Scale: NTS	Rev: A

IDEAL FENCING & GATES